


The Machine with unique combination of simplicity, flexibility and performance. It is the only pouch maker which has flexibility to produce not only Center seal / three side seal pouches, but also Stand up Zipper Pouches on the same platform.

| Specifications:                       |   |         | Attachments:   |
|---------------------------------------|---|---------|--|
| Types of Films                        | Laminates of PET+PE, MET PET+PE, CPP+BOPP |         |  |
| Processing Data                       | Minimum                                   | Maximum | Film Folding Device  |
| Off-wind Reel Diameter (mm)           |   | 600#    | Extension Frame  |
| Web Width (Lay-Flat Sheet Width) (mm) | 300                                       | 1000    | for Attachment Side Gusset Bottom Gusset Score Cut Punches Slit Hole Punch |
| Pouch Width (mm)                      | 150                                       | 500     |  |
| Draw Length (mm) Without Skip         | 100*                                      | 450     |  |
| Draw Length (mm) With Skip (Optional) | 200*                                      | 900     |  |
| Thickness of the Films (Microns)      | 40  | 140     |  |
| Maximum Speed** (Cycles/minute)       | 160                                       |         | <ul> <li>Pin Hole Punch</li> <li>Zip Insertion (From Box)</li> </ul>       |
| Motors                                |   |         | & Sealing (Mechanical)   |
| Off-Wind                              | AC Motor                                  |         | <ul> <li>Zip Squeezing (Mechanica)</li> <li>Customer Special</li> </ul>    |
| Film Index                            | AC Servo Motor                            |         |  |
| Main Motor (Cranking /Shearing)       | AC Motor                                  |         | Requirement  |
| General                               |   |         |  |
| Power Supply ##                       | AC, 3 Phase, 415 ± 6% Volt, 50 Hz         |         |  |
| Connected Load (Basic Machine)        | 16 KW                                     |         |  |

\* With limitation of Stacking quality. \*\* Depending on Types of Bag, Material, Thickness, Width & Draw-length. # Wide range of Unwind options are available. ## Special Power Supply Condition on request.

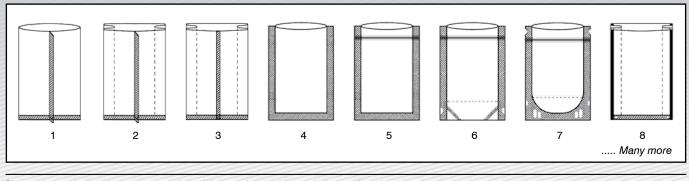

Photographs may show attachments or accessories, which may not be part of the standard scope of supply. The company reserves the right to modify, alter, change or substitute any feature & specifications which are subject to change without notice.

India Office & Works :





Survey No. 423/P, Sarkhej - Bavla Highway, Moraiya, Tal.: Sanand, Dist.: Ahmedabad - 382213, Gujarat, INDIA. Phone : +91-2717-300700 • E-mail : sales@mamata.com Website : www.mamata.com



## MAMATA ENTERPRISES, INC.

2275, Cornell Ave., Montgomery, IL-60538, USA. Phone : +1 630 801 2320 Fax : +1 630 801 2322 E-mail : info@mamatausa.com Website : www.mamatausa.com

Mechanical)