

WIN



WIN 750-P

Servo Driven Side Seal Bag Maker



VALUE FOR TRUST



WIN 750-P

Servo Driven Side Seal Bag Maker


The Best in class bag maker with path breaking price to performance Index. It has flexible options to select sealers for different films and various attachments to make wide range of value added bags.

Specifications:

Model	WIN 750 P	
Types of Webs / Films	HM-HDPE, LDPE, LLDPE, PP, CPP, BOPP	
	Maximum	Minimum
Film Roll Diameter (mm)	600	--
Web Width (mm)	750 [#]	100
Draw Length (mm)	750	50
Thickness of the Films (Microns)	Maximum	Minimum
• HM-HDPE	80	10
• LDPE/LLDPE	100	20
• PP	75	20
• CPP	75	20
• BOPP	40	20
Maximum Speed * (cycles/minute)	250	
Motors		
Off-Wind	AC Motor	
Film Index / Film Draw	AC Servo Motor	
Main Drive (Sealing Head)	AC Motor	
Product Conveyor Drive	AC Motor	
General		
Power Supply **	AC, 3 Phase, 415 ± 6% Volt, 50 Hz	
Connected Load	10 KW	
Foot Print (L x W x H) (mm)	3850 x 1600 x 1300 (Basic machine without Unwinder)	
Machine Weight ***	~1.3 MT (Basic machine without Unwinder)	

* Depending on Type of Bag, Material, Thickness, Width, Draw-length & Type of job being processed. ** Special Power Supply Condition on request.

*** The Machine weight given is indicative only. # Maximum Usable/Processing Width of Machines may be varying with attachments used.

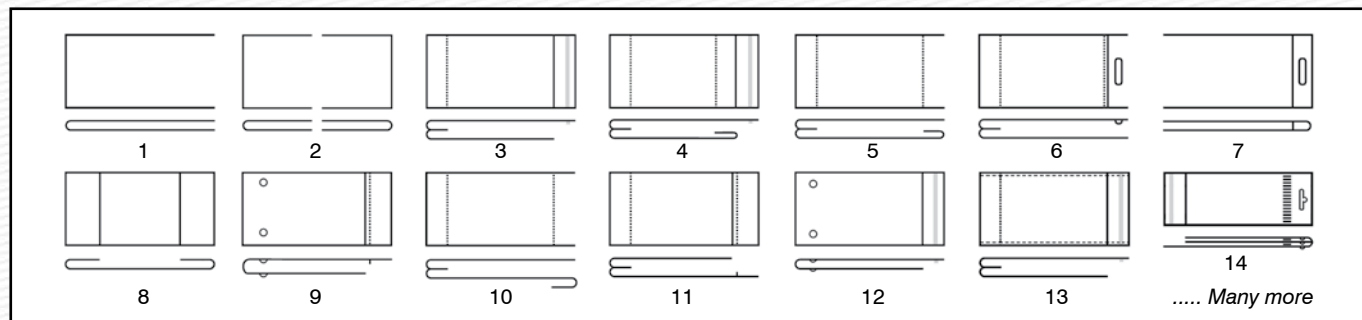

Attachments:

- | | | |
|---|--|---|
| <input type="checkbox"/> Wide Range of Un-winders | <input type="checkbox"/> Tape Applicator | <input type="checkbox"/> Carry Handle Punch |
| <input type="checkbox"/> Film Folding Device | <input type="checkbox"/> Dotted Seal | <input type="checkbox"/> Pin Hole Punch |
| <input type="checkbox"/> Slitter & Sealer Attachment | <input type="checkbox"/> Reinforcement Seal | <input type="checkbox"/> Ultrasonic Knurling |
| <input type="checkbox"/> Lip Formation + Lip Sealing Attachment | <input type="checkbox"/> Clean Cut Butterfly Punch | <input type="checkbox"/> Auto Stacker |
| <input type="checkbox"/> Linear Perforation | <input type="checkbox"/> Wicket Hole Punch | <input type="checkbox"/> Customer Special Requirement |
| <input type="checkbox"/> Bottom Gusseting Attachment | <input type="checkbox"/> Score Cut Hole Punch | |

Photographs may show attachments or accessories, which may not be part of the standard scope of supply.

The company reserves the right to modify, alter, change or substitute any feature & specifications which are subject to change without notice.

India Office & Works :



Survey No. 423/P, Sarkhej - Bavla Highway, Moraiya,
Tal.: Sanand, Dist.: Ahmedabad - 382213, Gujarat, INDIA.
Phone : +91-2717-300700 • E-mail : sales@mamata.com
Website : www.mamata.com



USA Office :



2275, Cornell Ave., Montgomery, IL-60538, USA.
Phone : +1 630 801 2320
Fax : +1 630 801 2322
E-mail : info@mamatausa.com
Website : www.mamatausa.com